

## THERMOSTATIC STEAM TRAPS AND AIR VENTS TSW22



### DESCRIPTION

The ADCA TSW22 series of balanced pressure thermostatic steam traps and air vents are specifically designed for use on process equipment such as sterilizers and other autoclaves, kettle cookers, food, chemical and laundry equipment. Their compact design makes them ideal when a fully stainless steel steam trap is required for air venting applications and condensate removal in small steam consumers.



### MAIN FEATURES

- Modulating discharge.
- Discharges condensate close to steam temperature.
- Thermostats for different sub coolings (5 to 30 °C).
- Excellent air discharge.
- Operates with moderate superheated steam.
- Simple and compact design.

USE: Saturated steam.

AVAILABLE MODELS: TSW22 – stainless steel, wafer design.

SIZES: DN 15 to DN 25.

CONNECTIONS: Sandwiched between flanges as per EN 1092-1 PN 40.

INSTALLATION: In any position.  
See IMI – Installation and maintenance instructions.


CE MARKING – GROUP 2 (PED – European Directive)	
PN 40	Category
DN 15 to 25	SEP

BODY LIMITING CONDITIONS	
WAFER PN 40 ALLOWABLE PRESSURE	RELATED TEMPERATURE
34,4 bar	100 °C
30,8 bar	150 °C
28 bar	200 °C
26 bar	250 °C

PMO – Maximum operating pressure: 22 bar.  
TMO – Maximum operating temperature: 250 °C.

FLOW RATE CAPACITY (kg/h)																
MODEL	SIZE	DIFFERENTIAL PRESSURE (bar)														
		0,2	0,3	0,5	1	1,5	2	3	4	6	8	10	13	15	20	22
TSW22	DN 15 to 25	70	120	140	255	330	385	455	510	600	670	700	720	750	775	795

Capacities shown refer to condensate discharge 10 °C below steam saturation temperature (standard type S thermostat).  
Thermostats for 5 °C (type H) and 30 °C (type L) also available. Capacities for cold condensate discharge at 20 °C are two to three times greater.

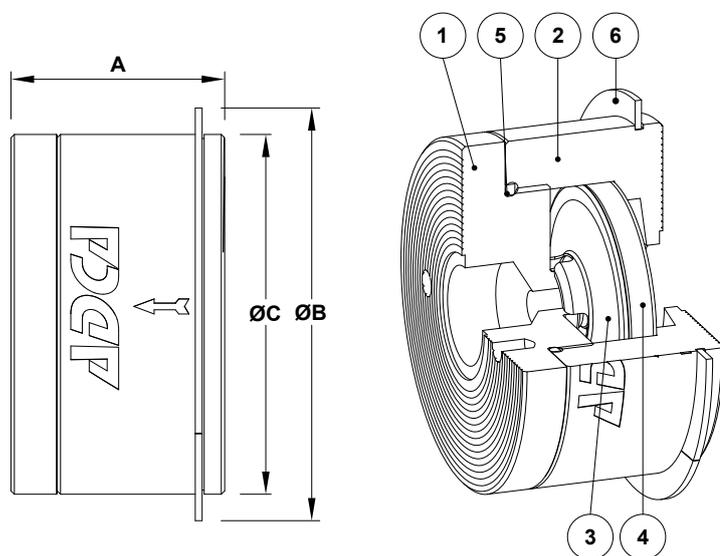

DIMENSIONS (mm)				
SIZE	A	ØB	ØC	WGT. (kg)
DN 15 *	25	51	43	0,3
DN 15 and 20 **	31,5	61	53	0,5
DN 25	35,5	71	64	0,8

\* Manufactured on request.  
\*\* The centering ring must be removed in order to install between flanges DN 15.

MATERIALS		
POS. N°	DESIGNATION	MATERIAL
1	Body	AISI 304 / 1.4301
2	Cover	AISI 304 / 1.4301
3	* Thermostatic element	Stainless steel
4	* Strainer screen	AISI 304 / 1.4301
5	* O-ring	EPDM
6	Centering ring	AISI 304 / 1.4301

\* Available spare parts.